Paweł Drzewiecki PL, ENG pawel.drzewiecki@eurotach.pl +48 501 326 326
Petar Simić PL, ENG petar@eurotach.pl +48 508 109 229
Maciej Lipka PL, ENG maciej.lipka@eurotach.pl + 48 501 326 023

Dane aktualne na dzień: 15-11-2026 06:03

Link do produktu: https://tachoparts.eu/adapter-m1n1-g2-14-do-tachografow-cyfrowych-continental-gen2v2-vdo-2910003568800-p-5417.html



Adapter M1N1-G2, 1:4 do tachografów cyfrowych Continental GEN2V2 VDO 2910003568800

Numer katalogowy	**2910003568800**
Producent	**VDO**

Opis produktu

1:4 (32000 imp/km : 4 = 8000 imp/km) □□

Adapter M1N1 może być instalowany tylko w pojazdach klasy M1 lub N1 i tylko wtedy, gdy montaż czujnika prędkości jest mechanicznie niemożliwy.
Adapter M1N1 ze zintegrowanym czujnikiem prędkości KITAS 4.0 2185 jest używany do pojazdów klas M1 i N1 z inteligentnymi tachografami
od DTCO® 4.0 i wyższych.


Adapter M1N1 jest przeznaczony do użytku z tachografami cyfrowymi i inteligentnymi, które są zgodne z rozporządzeniem (UE) nr 165/2014.
Adapter jest wstecznie kompatybilny i może być również używany z generacjami DTCO 1.x, 2.x i 3.x.

Kategorie pojazdów:
Kategoria M1: pojazdy silnikowe zaprojektowane i skonstruowane do przewozu pasażerów z maksymalnie ośmioma miejscami siedzącymi oprócz siedzenia kierowcy.
Kategoria N1: pojazdy silnikowe zaprojektowane i skonstruowane do przewozu towarów o maksymalnej dopuszczalnej masie nieprzekraczającej 3,5 tony.
Wbudowany czujnik prędkości

Installation position

- Do not install the device airtight.
- Keep your distance from heat-sensitive materials and components.

Electrical connections

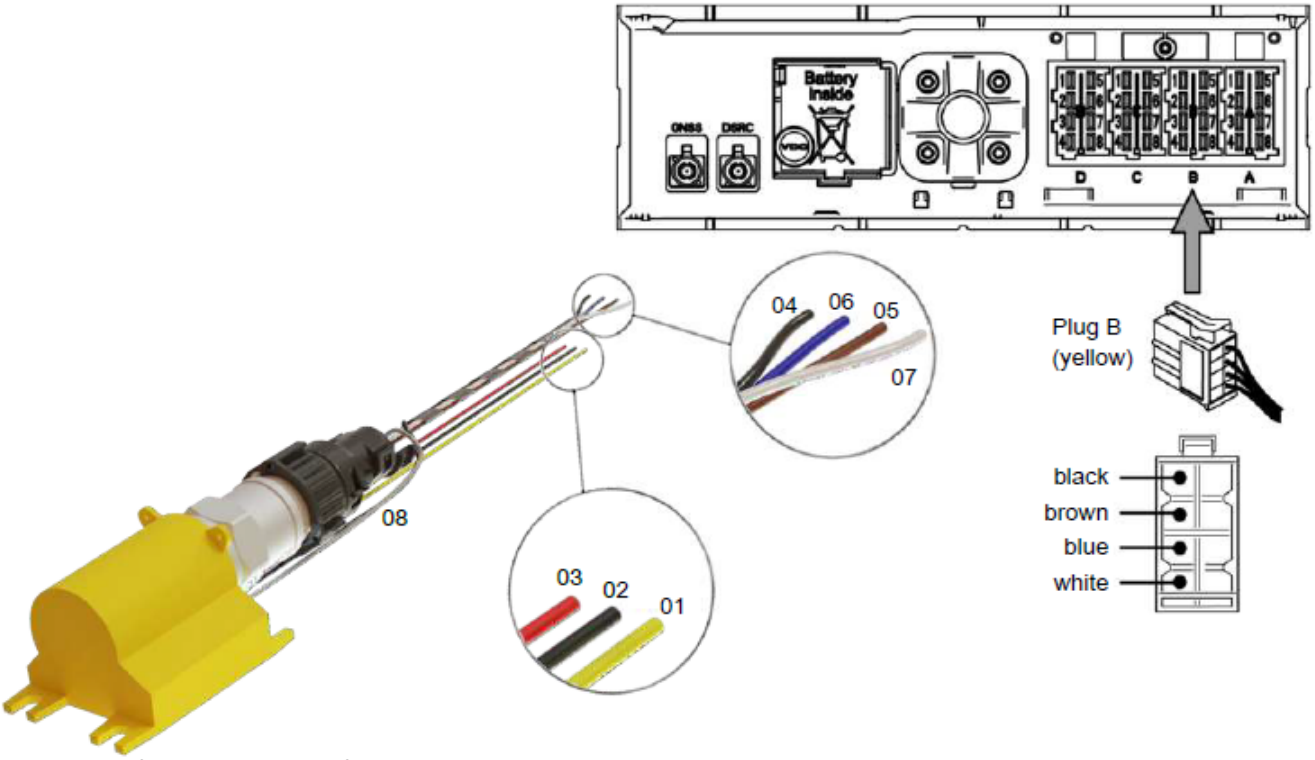

No.	Color	Description
01	yellow	Speed signal ((real-time) e.g.: Gala signal)
02	black	Mass
03	red	12 V power supply adapter *
04	black	9 V v-encoder supply +
05	brown	v-encoder supply -
06	blue	Real-time signal
07	white	Data signal I/O
08	grey	Switched power supply KITAS sensor (see block diagram)

* May only be connected to the vehicle's electrical system using a 5 A fuse.